

HIGH QUALITY ULTRA THIN SCREED FOR BONDED AND UNBONDED APPLICATIONS



Description

GYPSOL TS-15 screed is a revolutionary new anhydrite screed material. It is specially formulated to offer a strong and durable ultra-thin topping to a solid interior substrate, for example, in situ concrete or beam and block or precast concrete plank. Tested to BS8204:1:2003 it meets the requirements for class A for impact resistance. Due to its ultra-thin depth, just 15mm minimum, TS-15 can be dried quickly allowing rapid return to service and application of finished floor coverings.

Gypsol TS-15 is perfectly suited to flooring applications where height is extremely restricted and offers a lightweight cost effective alternative to smoothing compounds. It can be installed extremely quickly to at least 2000m² per day. This represents a significant saving in time when compared to bagged, site mixed smoothing compounds and levelling screeds.

Gypsol TS-15 screed is designed to be laid to a minimum of 15mm depth and can be used either bonded directly to a solid substrate prepared in accordance with BS8204:7:2003 or un-bonded on a polythene membrane.

For project specific advice on design and for a model specification, contact our technical and specifications team on **01928 574574**

Some typical applications include:

Refurbishment of old uneven floors.

Remediation or correction for out of level concrete slabs

As a levelling screed over floors where floor to ceiling height is very restricted.

Sub floor levelling in preparation to receive finished floor coverings.

Overlay for poorly levelled screeds

As an alternative to light weight screeds

PHYSICAL DATA

Appearance	Off white fluid mortar	
Density	Wet	2200kg/m ³
	Dry	2000kg/m ³
Typical Strength (28 days) N/mm ²	C35-F6	
Required Flow (EN 13454-2)	230mm to 270mm	
Reaction to fire	Class A1 _{fl} non combustible	


PERFORMANCE DATA

Working Time	Place within 2 hours of batching Finish within 1 hour of placing
Foot Traffic	24 to 48 hours
Loading	5 to 7 days
Drying Time (20°C/60% RH)	in excess of 1mm/day
Force Drying	Can be force dried after 7 days
Minimum Depth	15mm

TYPICAL APPLICATION SCHEMATIC

TS-15 Screed laid Un-Bonded

- Minimum 15mm Gypsol TS-15 Screed
- Polythene Slip Membrane
- Solid Substrate as specified
- Ceiling detail to be specified (not shown)

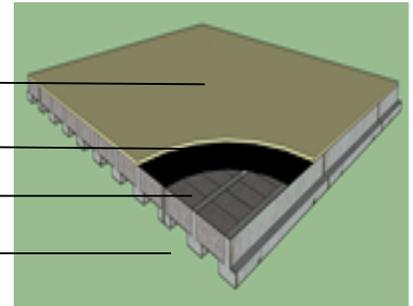

ENVIRONMENTAL DATA

Recycled content	Binder	98%
	Mortar	up to 40%
Carbon Emissions	Binder	10 to 20kg per tonne
	Mortar	20 to 40kg per m ³
VOC	Virtually Zero	
Recyclability	100%	

HEALTH AND SAFETY DATA

Gypsol TS-15 screed is delivered to site ready to use via offsite mixing plants eliminating the need for labour intensive site mixing and associated mixing equipment.

Gypsol TS-15 screed is pumped directly to where it is needed, eliminating much of the manual handling operations required to install other screeds.

Gypsol TS-15 screed is generally pumped using equipment with closed or grilled dispensing hoppers, removing risk of contact with moving machinery.

Gypsol TS-15 screed is finished using a lightweight dapping bar requiring no secondary compaction, thus removing most of the physical work needed to lay other screeds. This significantly reduces the negative impact on the musculoskeletal system of installing contractors. For material safety information please see the relevant health and safety data sheets.